


RECHARGEABLE

DUAL-SWITCH TACTICAL FLASHLIGHT

TAC-660XL

NIGHTSTICK
Life Depends on Light™

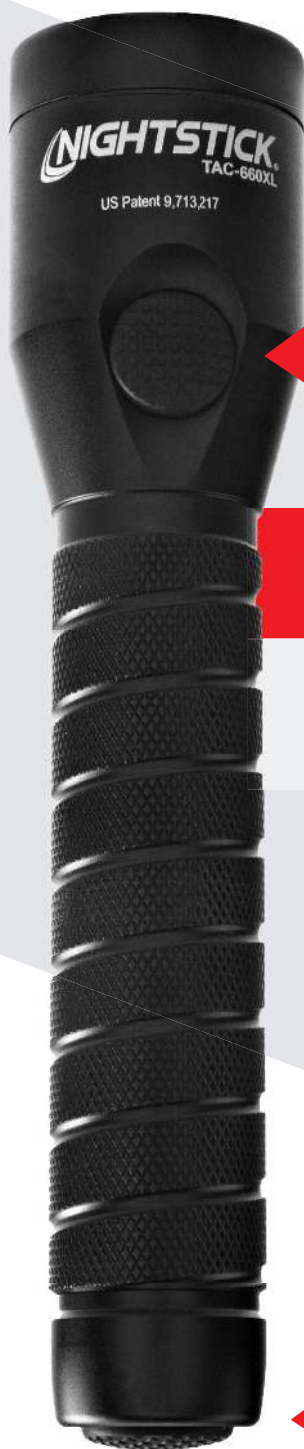

BEZEL SWITCH
FLOODLIGHT

DUAL SWITCHES

1100-lumen flashlight provides powerful focused beam, controlled by either bezel or tail cap switch.

TAIL SWITCH
FLASHLIGHT




Compact, focused beam from engineered reflector paired with industry-leading 1100 lumen LED.



Drop-in rapid charger keeps light handy and ready for use. Indicator light turns green when complete.



Press and hold bezel or tail cap switch to **cycle between high, medium and low modes.**



Helical body design with deep, spiral grooves and knurling provides a sure grip in wet or sweaty conditions.

FL1 STANDARD	SPOT HIGH	SPOT MEDIUM	SPOT LOW
	1100 LUMENS	550 LUMENS	150 LUMENS
	3.25h	8h 15min	30h
	228m	156m	87m
	13049cd	6072cd	1882cd
	2m		1m

1100 LUMENS

CE UK
CA

1-800-233-2155 • 1-469-326-9400 • nightstick.com

DUAL-SWITCH TACTICAL FLASHLIGHT

LI-ION BATTERY (INCLUDED)

ITEM NUMBER/UPC

- TAC-660XL, UPC 017398808644

MARKET APPLICATIONS

- Law enforcement, security, sporting goods, fire, rescue, industrial and automotive

CERTIFICATIONS

- CE, UKCA
- Meets requirements of NFPA-1971-8.6 (2013)

CASE MATERIAL

- Aircraft grade 6061-T6 aluminum with type II anodized finish

LUMENS/RUNTIME

- HIGH: 1100L, 3.25 hrs. runtime
- MEDIUM: 550L, 8.25 hrs. runtime
- LOW: 150L, 30 hrs. runtime

CANDELA

- HIGH: 13,049
- MEDIUM: 6,072
- LOW: 1,882

BEAM DISTANCE

- HIGH: 228 m
- MEDIUM: 156 m
- LOW: 87 m

WATER RATING

- IP-X7 Waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 6.25 in (159 mm)
- BARREL DIAMETER: 0.94 in (24 mm)
- BEZEL DIAMETER: 1.35 in (34 mm)
- WEIGHT: 5.9 oz (167 g) (with batteries)

BATTERY






- Li-ion rechargeable battery
2 CR123 (not included) carrier included

WARRANTY

- Limited lifetime warranty

WHAT'S INCLUDED

- Flashlight
- Drop-in rapid charger
- Li-ion rechargeable battery
- CR123 battery carrier
- AC/DC Charging cables
- Instruction manual

FL 1 STANDARD	SPOT HIGH	SPOT MEDIUM	SPOT LOW
	1100 LUMENS	550 LUMENS	150 LUMENS
	3.25h	8h 15min	30h
	228m	156m	87m
	13049cd	6072cd	1882cd
			

CERTIFIED



Patent #9,713,217